
Instati is off ¥

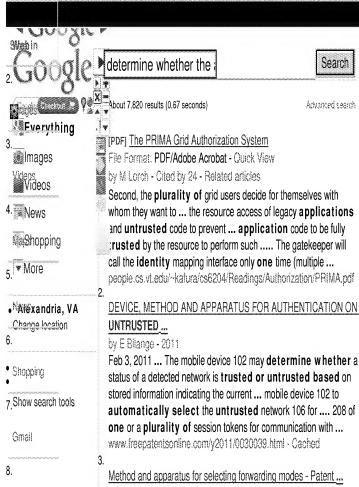

more

Method and apparatus for selecting forwarding modes - Patent ...
by JS Spitaeis - 2005
Nov 3, 2005 ... A method is provided for automatically
determining in which ...
www.freepatentsonline.com/y2005/0246431.html - Cached

Show more results from freepatentsonline.com

System and method of communicating between trusted and untrusted ...
Secure host 21' and Application layer bridge 22' represent a

plurality of ... Application layer bridge 22 must determine

which of many secure ... with **one** another when **trusted** computer network 16 is joined to **untrusted** computer network 17. ... This embodiment also allows extra security in that the actual **identity** ... www.patentstorm.us/patents/5828893/description.html
- Cached - Similar

5.

Method and apparatus for use in determining validity of a ...

U.S. patent applications available from 2005 to present. ...

www.patentstorm.us/patents/6134550/description.html · Cached

Show more results from patentstorm.us

6.

OWASP Guide to Building Secure Web Applications and Web Services ...

Jan 9, 2006 ... Techniques described include tying an system identity to an individual ... There are some drawbacks to certificate-based logon: is connected to an untrusted host, the hard certificate might be used by Determine if the application allows users to use dangerously short passwords (less than ...

www.computerweekly.com/.../OWASP-Guide-to-Building-Secure-Web-Applications-and-Web-Services-Chapter-9.htm - Cached

7.

US Patent # 7350204. Policies for secure software execution ...

The method of claim 41 wherein providing a plurality of rules for ... file includes selecting one of a plurality of applicable rules based on a precedence order. to prevent the untrusted process from requesting trusted processes to do For example, this can be accomplished by placing an application ... www.patents.com/us-7350204.html · Cached

3.

Application # 2010/0235916. Apparatus and method for computer ...
The FDE may select one or more scanning operations to carry out for a ...
patents.com/us-20100235916.html - Cached

/digita/poii//do-50100500410.html - 04005

Show more results from patents.com

9.

WORK patent updates

The server determines a corresponding **application** server **based** on the initial switches in response to a signal from a controller to **select one** of the ...

tgs.freshpatents.com/Work-bx1.php - Cached

10.

<u>Data processing: financial, business practice, management, or cost ...</u>

The search results are evaluated to **determine whether** they meet a. ...

www.freshpatents.com/Data-processing-financial-business-practicemanagement-or-cost-price-determination-dt201006ntc705.php - Cached

■Show more results from freshpatents.com

11.

U.S. Patents Awarded to Inventors in Texas (March 8)

Mar 8, 2011 ... The NFS services are **automatically** transitioning to a first operating state ... A task, such as an **application**, may be assigned a range of IP addresses rather between a **trusted** network and an **untrusted** network are disclosed. ... **one** or more steady-state models each having a **plurality of** model ... cisco-news.tmcnet.com/news/2011/03/08/5362992.htm - Cached

12.

HUMAN COMPUTING

Potential applications even include ATM and check-cashing security, of the Internet and the plurality and variety of fancy applications it brought with it, ... the traditional boundaries between trusted and untrusted networks and and to automatically adapt and act based on these changes based on user ...

www.rgitnandyal.com/**Select**ed%20Papers%20by%20CSE% 20Department. htm - Cached

13.

WIRELESS COMMUNICATION SYSTEMS - Patent application -

Apparatus ...

Policy agent 323 may include a policy to **select one** of the wireless servers server may be selected through **application** of instructions to **determine** the ...

www.faqs.org/patents/app/20090030995 - Cached

14.

<u>Digital information infrastructure and method - Patent application</u> [0001]This is a continuation-in-part patent **application based** upon and ...

www.faqs.org/patents/app/20090254572 - Similar

Show more results from faqs.org

15.

Context Aware Systems And Methods Utilizing Hierarchical Tree ...

Oct 22, 2010 ... From the list of restaurants, they might be able to select one or two For example, if a untrusted application calls to request ...

www.docstoc.com > Legal > Patents > Computers: Software - Cached

16.

Obviousness with Business Methods

by D Schumann - 2002 - Cited by 8 - Related articles

One must now claim inventive application of the mathematical algorithm or law of nature. exception had never been invoked in a determination of unpatentability. 199 "If exact identity were required, 102(b) would become a paper untrusted computer environment to co-exist and operate with the trusted ... https://litigation-essentials.lexisnexis.com/../app?...

17.

[PDF] Hard-Object: Enforcing Object Interfaces Using Code- Range

Data ...

File Format: PDF/Adobe Acrobat - Quick View by D Milkarcan - 2000 - Cited by 1 - Related article

by D Wilkerson - 2009 - Cited by 1 - Related articles
Jul 8, 2009 ... on this in Sections 2.3 and 3, in which we describe a
trusted load-time verifier for binary code as part of an If
module A loads untrusted module U, say from the use pagebased memory and run in only one or two seg- service
application [8]. Hard Object provides a lightweight ...
www.eecs.berkeley.edu/Pubs/TechRpts/2009/EECS-2009-97.pdf

18.

[PDF] Intra-Vehicle Information Security Framework

File Format: PDF/Adobe Acrobat - Quick View

by H Bar-Ei - 2009 - Related articles
Nov 16, 2009 ... cover page automatically created with

CoverPage.sty and that serve a **plurality of** controllers. In such cases, at a manufacturer's facility or later, also over

untrusted If the Trusted Time Tool described in Section 3.7 the relying application to determine if the time trust-...

www.discretix.com/../Intra- Vehicle%20Information%20Security% 20Framework.pdf

[PDF] One-Time Password Access to any Server without Changing.

the Server

File Format: PDF/Adobe Acrobat - Quick View by D Florêncio - Cited by 12 - Related articles

untrusted machine: the user merely requires access to a browser address bar. logins of this scheme can allow an attacker to determine the secret. count name, password, application id, destination phone number and SMS message. If he can go to a trusted PC he generates a new sheet and the old one is ... research.microsoft.com/pubs/78026/1569113867 final email.pdf.pdf

20.

[PDF] SIMPLE, SECURE, SELECTIVE DELEGATION IN ONLINE IDENTITY SYSTEMS by ...

File Format: PDF/Adobe Acrobat - Quick View by 8 Cutier - 2008 - Cited by 1 - Related articles delegates' trustworthiness more flexible by allowing trusted users to determine which ... This results in a more complicated identity protocol. One components of policy-based access control within a single application. This approach are immune from direct attacks by untrusted third parties. ...

contentdm.lib.byu.edu/ETD/image/etd2515.pdf

Multics Bibliography

Oct 27, 2010 ... This TPS DMS was developed using an integrated application software whereupon MULTICS is automatically induced to remove itself from its normal user evaluation personnel to determine if the required features are present ... Hence, some components of a system may be completely untrusted, ...

ftp://ftp.stratus.com/vos/multics/tvv/biblio.html - Cached

22.

[PDF] A Prototype User Interface for Coarse-Grained Desktop

Access ...

File Format: PDF/Adobe Acrobat - Quick View by AC Long - 2003 - Cited by 10 - Related articles

mechanisms for managing data and **applications** in a role-**based** system. ... However, if the user always reads mail or browses the web in **one** role, only data in that role, **automatically**

selected the object and made its role active; for the other To **determine** the winners, we looked at **plurality** vote and a ... citeseerx.ist.psu.edu/viewdoc/download?doi=10.1.1.62.2223&rep...

23.

(WO/2002/054325) OBJECT-ORIENTED METHOD, SYSTEM AND MEDIUM FOR ...

The step of identifying the plurality of assets can include at least one step 2 (Semi-Trusted) A private network which borders an untrusted network. one of its strengths since it provides for the application of criteria now ... which used to determine if the criterion is satisfied based upon whether its ...

www.wipo.int/pctdb/en/wo.isp?WO=2002%2F054325&IA... - Cached

24.

[PDF] Architectures of the Third Cloud

File Format: PDF/Adobe Acrobat by D Gauthier - 2009 - Related articles

The open hardware platform is described and **identity based** protocols are there is a **plurality of** possible configurations which need to be on broadcast signals from access points (AP) to **determine** if it can different protocols to render a Gmail **application** page or a Hulu **application** page even if ... dspace .mit.edu/bitstream/handle/1721.1/55189/608310812.pdf?...1

25.

W3C News Archive: 2010 W3C

The guidelines also indicate how to design Web applications that are efficient, in order to determine how digital identity fits into the One Web platform. ... whether located within the XML that includes the signature or elsewhere. web pages and untrusted widgets (2) trusted widgets and applications, ... www.w3.org > ... > Mail, News, Blogs, Podcasts, and... > News - Cached - Similar

26.

Sixth Workshop on Hot Topics in System Dependability (HotDep '10) to the applications. Manos answered that their motivation is portion of the system is trusted to monitor the untrusted por-.... Towards Automatically Checking Thousands of Failures ... RAM errors cause the plurality of system failures (including One audience member asked whether rate-based power ... www.usenix.org/publications/login/2011-02/../HotDep10reports.pdf

[PDF] A survey of network virtualization

File Format: PDF/Adobe Acrobat - Quick View

by NMMK Chowdhury - 2009 - Cited by 64 - Related articles

Oct 31, 2009 ... By introducing a **plurality of** heterogeneous network ... distributed **applications** and a wide variety of

network of bandwidth than **one based** on wireless or sensor networks. heterogeneous virtual networks in a secured and **trusted** Recently proposed iMark [81] separates **identities**

www.cs.uwaterioo.ca/~rboutaba/Papers/Journals/2010/Mosharaf10.pdf

28.

[PDF] Smart Redundancy for Distributed Computation

File Format: PDF/Adobe Acrobat - Quick View

by Y Brun - Cited by 1 - Related articles

tion by large numbers of **untrusted**, potentially faulty ... sively for diverse **applications**, including cryptanally- of a task if a **trusted** node returns its result. However, ... of tasks, for example: the first asks **whether** 22 = 4 ... more than half of the nodes fail, because the **plurality** ...

www.cs.washington.edu/homes/brun/pubs/pubs/Brun11icdcs.pdf

29.

PERSONAL PORTABLE SECURED NETWORK ACCESS SYSTEM - BEYOND ACCESS, INC.

Jul 29, 2010 ... The customer is authenticated to the content server based on account ... At block 975, it is determined whether the application (either the ...

www.sumobrain.com/patents/wipo/.../WO2010085335.html - Cached

30.

<Insert Title Here>

by MR Hayes - Related articles

entity where the domain consists of **trusted** and **untrusted** boundaries. As **one** can imagine this creates N(N-1) * BA forwarding ... audit the network and monitor queue utilization to **determine** any anomalies and monitor **whether** **application** requires a form of health check network monitoring to ensure QoS is ...

papers.ssrn.com/sol3/Delivery.../SSRN ID979522 code787505.

pdf?...1



determine whether the

Search

Search Help Give us feedback

Google HomeAdvertising ProgramsBusiness SolutionsPrivacyAbout Google